

FLEXIGUARD®
LADDER FAS

flexiguard®

MOVE IT
LOCK IT
CLIMB IT



THE ULTIMATE IN FALL PROTECTION

PRODUCT SHEET

FLEXIGUARD® LADDER FAS



DURABLE

- Powder coated T 6061 lightweight aircraft aluminium and steel
- Foam protected non-slip platform
- Wheels: Heavy-duty urethane or foam filled pneumatic (won't go flat)
- 100% fall arrest rated tie-off from the ground up

PORTABLE

- Towable design for easy mobility
- Lightweight design, easy to move
- Heavy-duty stabilisation jacks
- Lightweight design, easy to move by two people

VERSATILE

- Indoor and outdoor use
- Multiple overhead anchor points based on design
- Collapsible design for transportation
- Adjustable handrails
- Several standard height options available
- Lifting kit available

CUSTOM

- Custom designs available to meet your specifications
- Specialised installation, supervision and training are available with every solution

The Ladder Fall Arrest System (FAS) combines easy access to elevated work areas with 100% fall protection for one or more operators from the ground up for the duration of the work being performed. Ladder FAS models are AS/NZS, ANSI, OSHA, CSA, and CE compliant.



HEIGHT OPTIONS

Adjustable Height Systems

- Manual height adjustment via winch assembly
- Multiple height adjustment ranges available
- Height ranges can be customised to meet your specific requirements

WHEELS



Foam Filled Wheels

- Greatest flexibility option for tight work areas
- Easy to move and change position
- Ideal for both smooth and rough surfaces

OPTIONAL COMPONENTS



Tow Bar

- Allows for towing behind a service vehicle
- Removable for storage




30.5cm Heavy-Duty Urethane Wheels

- Heavy-duty bearings
- Ideal for level surfaces such as concrete or asphalt
- Swivel lock brakes (optional)



40.6cm Foam Filled Pneumatic Wheels

- Heavy-duty bearings
- Brakes
- Handles both level and unlevel surfaces (gravel)

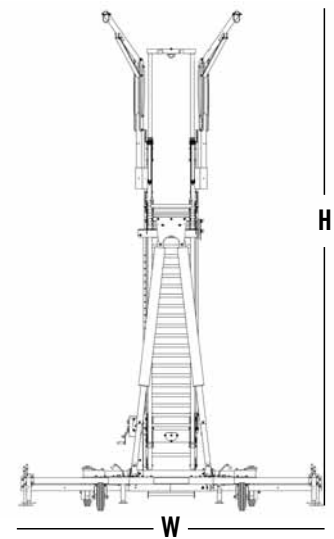

Free-standing system

STANDARD SYSTEM DIMENSIONS

W	Maximum Outrigger Width	6.10m
H	Maximum Height	11.90m
Users	Maximum Number	3

Custom designs are available based on customer's specific requirements. Measurements illustrated in the above chart are subject to tolerances. Please consult manufacturer's specification sheets for further technical details.



Capital Safety - Australia & New Zealand
Australia: 1800 245 002 | New Zealand: 0800 212 505
www.capitalsafety.com.au
sales@capitalsafety.com.au



Quality
ISO 9001



Environment
ISO 14001



Health & Safety
AS 4801